

THE MOST VERSATILE HOLDING CABINET ON THE MARKET!

Electric or non-electric transporter holds GN food pans, sheet pans, trays and pizza boxes all in one!



NON-ELECTRIC:

- Passive hot or cold holding for 4 hours or more.
- Durable, rust-free, dent-free, one-piece molded polyethylene body filled with polyurethane foam insulation that easily holds food at safe temperatures and out of the danger zone.
- Adjustable stainless steel Universal rails take the guesswork out of choosing rail systems each time.

ELECTRIC: Features all of the above PLUS

- Separate, dual compartments with heaters on one or both doors maximize food quality.
- Available in energy-efficient 110V and 220V models.

CAMBRO
TRUSTED FOR GENERATIONS™

the NEW Combo Cart™ Plus

NON-ELECTRIC

Non-electric holds hot or cold foods for 4 hours or more.

MARINE RAILING

Creates a bonus staging area for food pans.



Each cart holds up to:
32 full size sheet pans,
64 half size sheet pans,
28 GN 1/1 food pans (2 1/2" / 6,5 cm deep),
32 each 40 x 60 cm trays,
52 each 32,5 x 53 cm trays or
22 large pizza boxes per cart.

WIDE PADDLE LATCHES

For easy opening and closing.

STANDARD 6" x 1 1/4" (15 x 3,2 cm) CASTERS

High-Performance, all swivel with brakes for smooth positioning and navigation; non-marking.

PERIMETER BUMPER

Protects cart and walls.



ERGONOMIC VERTICAL MOLDED-IN HANDLES

Will never break; great for maneuvering by operators of all heights.



GASKET-FREE

Worry-free door! Swings open completely to the side.



POWER ON AND HEAT ON INDICATORS

Communicate the power and heating status of the unit. Know instantly when the compartment has reached target temperature. Turn on and off without unplugging the cord.

The Combo Cart *Plus* is ideal for...

Large events • Applications that require frequent opening and closing • Flexible menu options
Holding and Transport • Operators who demand reliability and durability, under peak performance

ELECTRIC ⚡

Keeps food safely between 150°F to 165°F (65°C to 74°C) with convenient, pre-set, gentle, non-radiant heat.

POLYETHYLENE EXTERIOR

Keeps food moist naturally and remains cool to the touch during operation, unlike metal cabinets.



Electric
Holds hot foods for as long as you need it to.

ENERGY-SAVING HEATER

Over 50% more energy efficient compared to leading metal carts! Gentle, non-radiant heat circulates consistently from front to back of the cabinet.

SOLAR DIGITAL THERMOMETER


Monitor internal cabinet temperature at a glance.

CORD KEEPER

Stores 9' (2,7 m) power cord neatly and safely.

HEAVY DUTY 6" x 2" (15 x 5 CM) CASTERS

Hi-modulus, non-marking rubber casters.

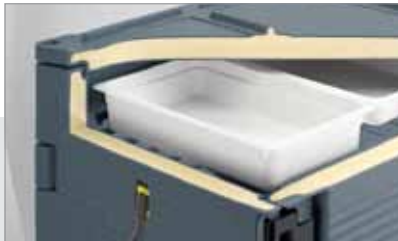

INSULATION

CFC-free, polyurethane insulation throughout the body and doors maximizes heat or cold retention for 4 hours or more.



STAINLESS STEEL UNIVERSAL RAILS

Hold sheet pans, food pans, pizza boxes and trays (or limitless combinations of these!)



5" x 8" (12,7 x 20,3 CM) MENU POCKET

Allows for easy product ID with either an index card or by writing directly onto smooth surface with a grease pencil.

Holding Capacity Reference for **NEW COMBO CART™ PLUS Tall** (Per Cart)

TYPE of CONTAINER	STANDARD CAPACITY	MAXIMUM CAPACITY
18" x 26" (45,7 x 66 CM) FULL SIZE SHEET PANS	14	32*
13" x 18" (33 x 45,7 CM) HALF SIZE SHEET PANS	28	64*
GN 1/4 HOTEL PANS (2 1/2" / 6,5 CM DEEP)	28	28
GN 1/4 HOTEL PANS (4" / 10 CM DEEP)	20**	20
40 x 60 CM (20 1/2" x 23 1/2") TRAYS (LIP LOAD)	14	32*
32,5 x 53 CM (12" x 20") TRAYS	28	52*
PIZZA BOXES 16" x 16" x 2" (40,6 x 40,6 x 5,1 CM)	14	22*

*Additional rails required.

**Only requires 5 pairs of rails.

Electrical Specifications (Per Compartment)

	110V MODELS	220V MODELS
REQUIRED VOLTAGE	100-125 VAC	200-230 VAC
MAXIMUM AMP	4.6a	2.3a
WATTS	529w	506w
HERTZ	50/60	50/60
PHASE	Single	Single
PLUG TYPES	5-15 to C15RA	CEE7/7 to C15RA
ALTERNATE PLUG TYPES FOR INTERNATIONAL	JIS8303 to C15RA (Japan)	BS1363 to C15RA (UK / Ireland+more)
POWER CORD LENGTH	9 ft.	2,7 m



CODE	DESCRIPTION	UNIT WEIGHT	CASE LB (CUBE) / CASE KG. (M ³)	LIST PRICE EACH
Non-Electric				
CMBP	Standard Casters	209.5 lbs (95,03 Kg)	230 (42.5) / 104,33 (1,2)	\$ 5,230.00
CMBPHD	Heavy Duty Casters	218.5 lbs (99,11 Kg)	239 (42.5) / 108,41 (1,2)	5,370.00
Electric				
CMBPH	110V, Standard Casters	231.5 lbs (105,01 Kg)	252 (42.5) / 114,31 (1,2)	7,555.00
CMBPHHD	110V, Heavy Duty Casters	240.5 lbs (109,9 Kg)	261 (42.5) / 118,39 (1,2)	7,695.00
CMBPH2	220V, Standard Casters	231.5 lbs (105,01 Kg)	252 (42.5) / 114,31 (1,2)	7,555.00
CMBPH2HD	220V, Heavy Duty Casters	240.5 lbs (109,9 Kg)	261 (42.5) / 118,39 (1,2)	7,695.00
CMBPTH	110V, Top Door Heated only, Standard Casters	221.5 lbs (100,5 Kg)	242 (42.5)/ 109,8 (1,2)	6,675.00
CMBPTHHD	110V, Top Door Heated only, Heavy Duty Casters	228.5 lbs (103,6 Kg)	249 (42.5)/113 (1,2)	6,815.00
CMBPTH2	220V, Top Door Heated only, Standard Casters	221.5 lbs (100,5 Kg)	242 (42.5)/ 109,8 (1,2)	6,675.00
CMBPTH2HD	220V, Top Door Heated only, Heavy Duty Casters	228.5 lbs (103,6 Kg)	249 (42.5)/113 (1,2)	6,815.00

Case Pack: 1 Color: Charcoal Gray (615).

Standard Railing Includes: 7 pairs of stainless steel Universal rails / compartment.

Standard Casters: 6" x 1 1/4" (15 x 3,2 cm) casters.

Heavy-Duty Casters (HD): 6" x 2" (15 x 5 cm).

Options: Security Package (SP).

Patent pending.

Exterior Dimensions W x D x H: 27 3/8" x 33 1/2" x 65 5/8" (70,2 x 85,1 x 167,3 cm)

Compartment Dimensions W x D x H: 21 1/8" x 29" x 26 1/2" (53,7 x 73,7 x 67,3 cm)

ACCESSORIES

CODE	DESCRIPTION
CMBPR1	1 Pair of Rails
CMBPR7	7 Pairs of Rails



CAMBRO
TRUSTED FOR GENERATIONS™

Cambro USA
TEL: (714) 848 1555
FAX: (714) 842 3430
Customer Service Dept: (800) 833 3003

C.E.L.
TEL: (31) 168 707 210
FAX: (31) 168 707 211

NORTH IRELAND & UK
TEL: 0800 587 0057 Toll Free
FAX: 0845 280 3411

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056
LIT1215 Prices subject to change without prior notification. Printed in USA REV 07/12.

